


ALUMINUM ELECTROLYTIC CAPACITORS

● Radial Taping Specifications 零件品規格尺寸

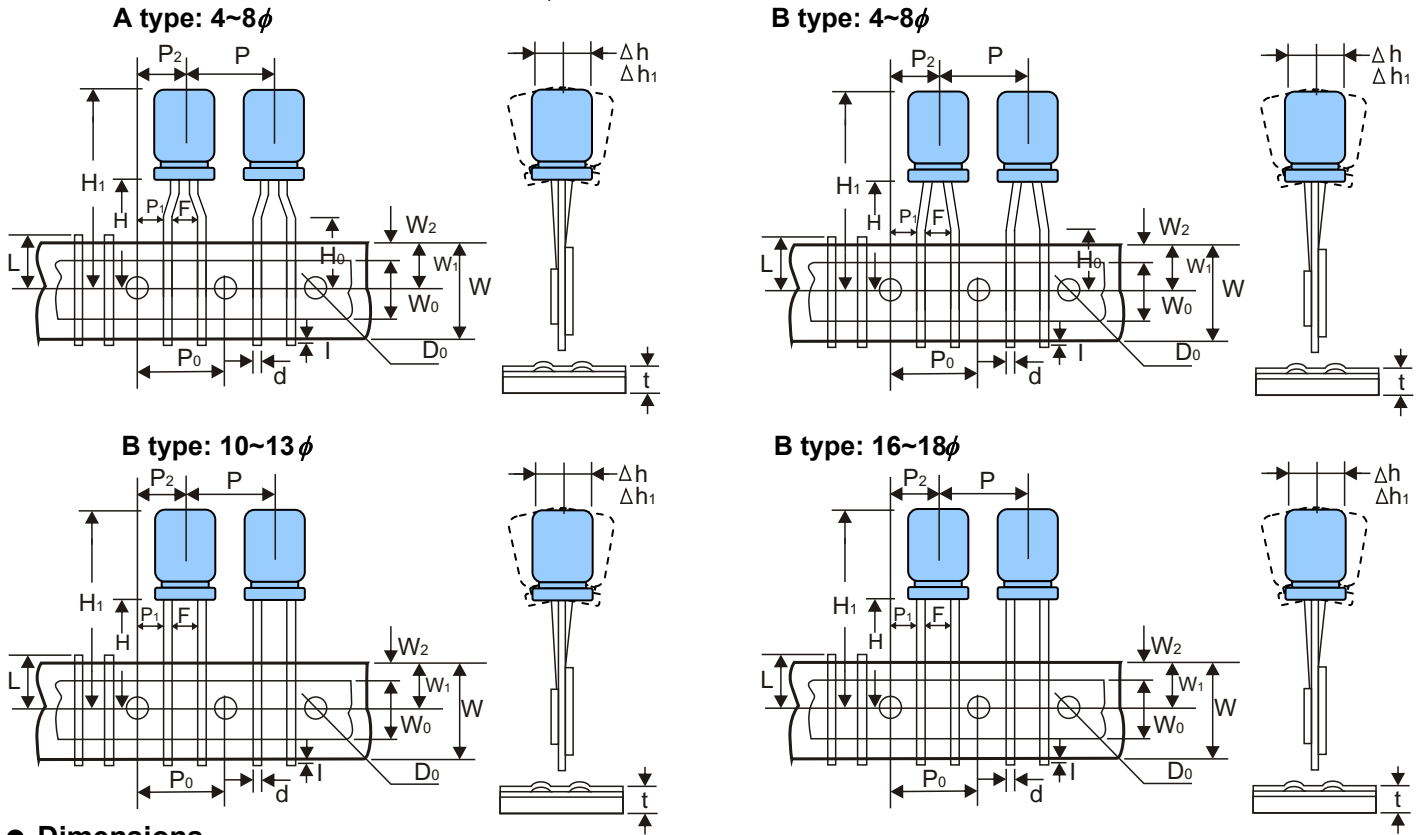

● Dimensions


item	Type/Size Code	Forming Lead (A) Type			Straight Lead (B) Type								Tolerance
		4φ	5~6.3φ	8φ	4φ	5φ	6.3φ	8φ	10φ	13φ	16φ	18φ	
Lead wire diameter 端子線直徑	φd	0.45	0.5		0.45	0.5		0.6	0.6	0.8		± 0.05	
Intervals of bodies 電容本體間隔	P	12.7			12.7			15.0		30.0		± 1.0	
Intervals of feeding holes 打孔之間隔	P ₀	12.7			12.7			15.0			± 0.2		
Feeding hole off alignment 打孔與端子線距離	P ₁	3.85			5.1		4.6	3.85	5.0	3.75		± 0.7	
Feeding hole off alignment 打孔與本體距離	P ₂	6.35			6.35			7.5			± 1.0		
Lead center spacing 端子線距離	F	5.0			2.5		3.5	5.0	5.0	7.5		+ 0.8 - 0.2	
Base tape width 台紙寬度	W	18.0			18.0								± 0.5
Adhesive tape width 黏貼紙寬度	W ₀	12.5			12.5			15.0			Min.		
Feeding hole off alignment 打孔與台紙偏差	W ₁	9.0			9.0								± 0.5
Adhesive tape off alignment 黏貼紙與台紙偏差	W ₂	1.5			1.5								Max.
Body (Bottom) height 本體與台紙孔中心距離	H	17.5	18.5	20.0	18.5			18.5			± 0.75		
Lead clinch height 端子線成型高度	H ₀	16.0			-								± 0.5
Cut lead height 端子線突出高度	l	1.0			1.0			-					Max.
Feeding hole diameter 打孔直徑	φD ₀	4.0			4.0								± 0.2
Body inclination 本體前後傾斜偏差	Δh	0			0								± 2.0
Body inclination 本體左右傾斜偏差	Δh ₁	0			0								± 2.0
Total tape thickness 台紙與黏貼紙厚度	t	0.7			0.7								± 0.2

ALUMINUM ELECTROLYTIC CAPACITORS

• Packing 點焊品包裝


Tape/Ammo Box --- For Radial Type

unit: mm

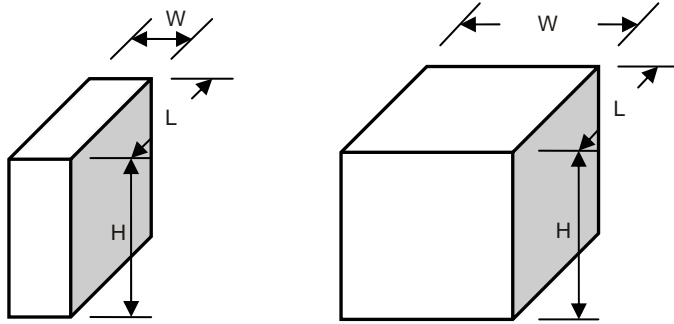


Packing Size	Q'ty	Inner Box 內盒			Outer Carton 外箱			
		數量 (pcs)	W	L	H	數量 (pcs)	W	L
4x5~7	3,000	230	335	53	30,000	350	476	290
5x5~11	2,000				20,000			
6x5~15	1,500				15,000			
8x5~20	1,000				10,000			
10x12~20	600				8,000			
13x13~26	300	300	340	70	3,000	350	476	290
16x26~32	300	300	340	70	3,000			
16x36	300	300	340	70	3,000			
18x36	250	300	340	70	2,500			

Tape/Reel Box --- For Radial Type

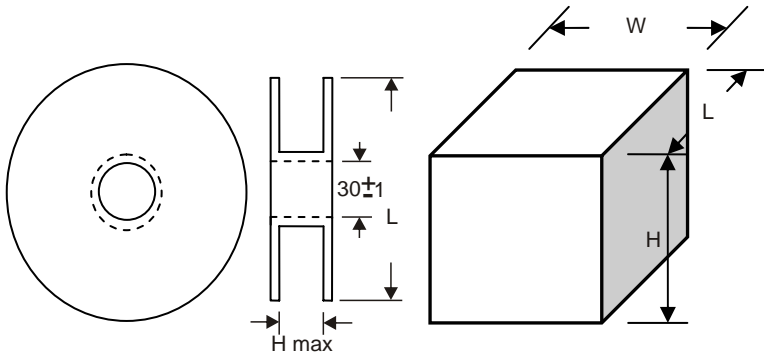

Packing Size	Q'ty	Inner Box 內盒			Outer Carton 外箱			
		數量 (pcs)	W	L	H	數量 (pcs)	W	L
4 x 7	2,500	365	365	110	15,000	380	380	360
5x7~11	1,500				9,000			
6x7~11	1,000				6,000			
8x11~14	800				4,800			
10x12~16	600				3,600			

Tape/Reel Box --- For Axial lead

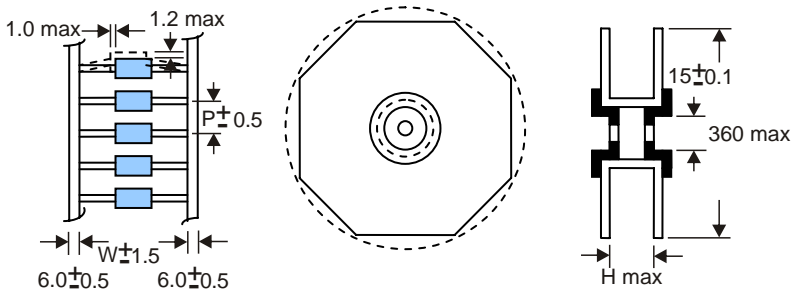

Specifications		Case		W	H	Dia. (Dφ)	Q'ty(pcs)
Package	W	P	Dia.(φ)				
Reel Pack	52	10	5, 6, 8	52 (63)	70 (82)	5	1,500
	63	10	5, 6, 8			6	1,000
	52	15	10			8	700
	63	15	10 / 13			10	300
						13	250